


GFS VS-560 Valve Packing

Braiding from Inconel® jacketed, 98% purity flexible graphite

Description

Braided from Inconel® jacketed, 98% purity flexible graphite, Style VS-560 is ideally suited for extremely high temperature and pressure valve service applications. Our unique reinforcement and densification process exceeds API 622 2nd Ed test standards, and is an ideal solution for containment of fugitive emissions at below 5 PPMv average leakage. Style VS-560 is non-scoring and self lubricating, with a unique combination of Corrosion Inhibitors. An excellent choice for Leak Detection and Repair (LDAR) programs.

Construction:	Plait Braid
Temperature Rating:	850°F / 455°C Air 1200°F / 649°C Steam 2000°F / 1100°C Non-Oxidizing Atmosphere
pH Rating:	0 - 14
Shaft Speed Rating:	N/A
Pressure Rating:	6500 PSI / 448 Bar

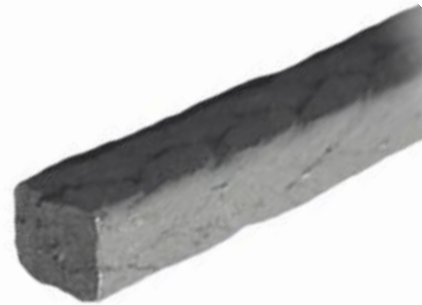

Gallagher Fluid Seals, Inc.
500 Hertzog Blvd., King of Prussia, PA 19406
Phone: (610) 277-8200 | Fax: (610) 277-3850
www.gallagherseals.com
info@gallagherseals.com
The Seal Specialist

